SPEC SHEET

Engineered Solid Oak Plank S

PRODUCT

Our answer to solid wood flooring: three layers of solid timber, glued and dried to the same moisture level. Reduced cracking, warping, swelling and shrinking compared to solid planks. Multiple bevel options available, including Nickel Gap, which gives the look of a laid solid wood floor.

COLLECTION

The Classic Collection is built for flexibility. Any colour can be combined with any grade and any haptic, from light to deep tones that work across every interior and every style.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Oak · Oak



DIMENSIONS

LENGTHS	min. 1000 mm - max. 5000 mm
WIDTHS	min. 40 mm - max. 500 mm
THICKNESS	20, 23, 28, 35 mm · 5 mm top layer + 10, 13, 18, 25 mm core + 5 mm back layer
	Custom dimensions on request

INSTALLATION PATTERNS

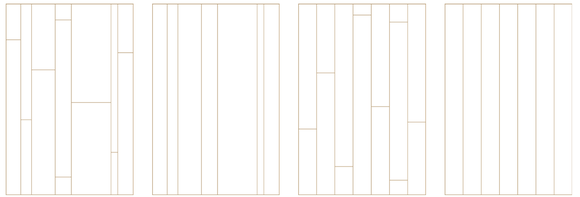

random widths,
random lengths

random widths,
fixed lengths · room lenght

fixed widths,
random lengths

fixed widths,
fixed lengths · room lenght

Custom patterns on request

GRADES



Prime

Natural

Refined Heart

Bold



Character

Core

Grade Images are for guidance only. Wood is a natural material, colour and grain can vary.

SURFACE SPECIFICATIONS

WOOD TYPE	Quercus robur – quercus petrea
GRADES	Prime · Natural · Refined Heart · Bold · Character · Core
HAPTICS	Sanded · Brushed · Naturally Dried · Hand-Planed · Saw-cut · Custom on request
COLOURS	TDW Classic Collection · Custom
PROTECTION	Natural Oil · Varnish · Soap
BEVELS	V - Micro 0,6 mm / Medium 1,0 mm / Large 1,5 mm · Nickel Gap 1,0 mm · no Bevel
OPTIONS	Butterfly inserts · repairs of open knots with insert knots

TECHNICAL INFORMATION

CE-CERTIFICATION	EN 13489(14342)
PEFC	PEFC/04-31-2700
FORMALDEHYDE EMISSION	E1
FIRE CLASS	Dfl - s1
UNDERFLOOR HEATING	suitable
UNDERFLOOR COOLING	suitable
INSTALLATION	full-surface glue-down
APPLICATION AREA	private · commercial
WOOD MOISTURE	7 % (+/- 2 %)
	Optional extra drying – upon prior request

SPEC SHEET

Engineered Solid Oak Plank L

PRODUCT

Our answer to solid wood flooring: three layers of solid timber, glued and dried to the same moisture level. Reduced cracking, warping, swelling and shrinking compared to solid planks. Multiple bevel options available, including Nickel Gap, which gives the look of a laid solid wood floor.

COLLECTION

The Classic Collection is built for flexibility. Any colour can be combined with any grade and any haptic, from light to deep tones that work across every interior and every style.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Pine · Oak



DIMENSIONS

LENGTHS	min. 5000 mm - max. 13500 mm
WIDTHS	min. 40 mm - max. 500 mm
THICKNESS	20, 23, 28, 35 mm · 5 mm top layer + 10, 13, 18, 25 mm core + 5 mm back layer
	Custom dimensions on request

INSTALLATION PATTERNS

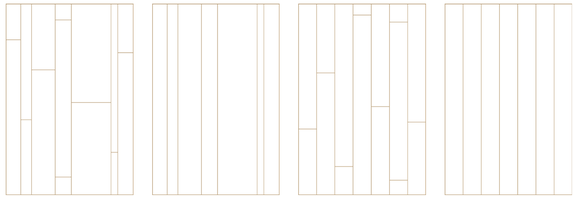

random widths,
random lengths

random widths,
fixed lengths · room lenght

fixed widths,
random lengths

fixed widths,
fixed lengths · room lenght

Custom patterns on request

GRADES



Prime

Natural

Refined Heart

Bold

Character

Core

Grade Images are for guidance only. Wood is a natural material, colour and grain can vary.

SURFACE SPECIFICATIONS

WOOD TYPE	Quercus robur – quercus petrea
GRADES	Prime · Natural · Refined Heart · Bold · Character · Core
HAPTICS	Sanded · Brushed · Naturally Dried · Hand-Planed · Saw-cut · Custom on request
COLOURS	TDW Classic Collection · Custom
PROTECTION	Natural Oil · Varnish · Soap
BEVELS	V - Micro 0,6 mm / Medium 1,0 mm / Large 1,5 mm · Nickel Gap 1,0 mm · no Bevel
OPTIONS	Butterfly inserts · repairs of open knots with insert knots

TECHNICAL INFORMATION

CE-CERTIFICATION	EN 13489(14342)
PEFC	PEFC/04-31-2700
FORMALDEHYDE EMISSION	E1
FIRE CLASS	Dfl - s1
UNDERFLOOR HEATING	suitable
UNDERFLOOR COOLING	suitable
INSTALLATION	full-surface glue-down
APPLICATION AREA	private · commercial
WOOD MOISTURE	7 % (+/- 2 %)
	Optional extra drying – upon prior request