SPEC SHEET

Grand Oak Plank S Reclaimed

PRODUCT

Wide-format oak flooring for design freedom, not manufacturing convenience. Widths and lengths run varied or fixed, exactly as the design intent demands. Matched to the space instead of a factory standard. The floor reads as a deliberate choice, not a standard product laid down.

COLLECTION

The Reclaimed Collection brings the character of genuinely old, reclaimed timber, worn surfaces, visible defects and aged patina into new wood. This removes the size and quantity limits that real salvaged material imposes. It is one fixed combination of colour, grade and surface haptic.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Pine · Oak



DIMENSIONS

LENGTHS	min. 1000 mm - max. 5000 mm
WIDTHS	min. 40 mm - max. 500 mm
THICKNESS	19 mm · 5 mm top layer + 9,5 mm core + 4,5 mm back layer
	Custom dimensions on request

INSTALLATION PATTERNS



random widths,
random lengths



random widths,
fixed lengths · room lenght



fixed widths,
random lengths



fixed widths,
fixed lengths · room lenght

Custom patterns on request

GRADES



Reclaimed

Grade Image is for guidance only. Wood is a natural material, colour and grain can vary.

SURFACE SPECIFICATIONS

WOOD TYPE	Quercus robur - quercus petrea
GRADES	Reclaimed
HAPTICS	Worn Texture + Nail Holes + unfilled small Knots and Cracks + Defects
COLOURS	TDW Reclaimed Collection · Custom
PROTECTION	Natural Oil
BEVELS	1 mm Nickel Gap + Light Distressed
OPTIONS	Wood Insert Repairs on open Knots and Cracks

TECHNICAL INFORMATION

CE-CERTIFICATION	EN 13489(14342)
PEFC	PEFC/04-31-2700
FORMALDEHYDE EMISSION	E1
FIRE CLASS	Dfl - s1
UNDERFLOOR HEATING	suitable
UNDERFLOOR COOLING	suitable
INSTALLATION	full-surface glue-down
APPLICATION AREA	private · commercial
WOOD MOISTURE	7 % (+/- 2 %)
	Optional extra drying – upon prior request

SPEC SHEET

Grand Oak Plank L Reclaimed

PRODUCT

Wide-format oak flooring for design freedom, not manufacturing convenience. Widths and lengths run varied or fixed, exactly as the design intent demands. Matched to the space instead of a factory standard. The floor reads as a deliberate choice, not a standard product laid down.

COLLECTION

The Reclaimed Collection brings the character of genuinely old, reclaimed timber, worn surfaces, visible defects and aged patina into new wood. This removes the size and quantity limits that real salvaged material imposes. It is one fixed combination of colour, grade and surface haptic.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Pine · Oak



DIMENSIONS

LENGTHS	min. 5010 mm - max. 12000 mm
WIDTHS	min. 40 mm - max. 500 mm
THICKNESS	19 mm · 5 mm top layer + 9,5 mm core + 4,5 mm back layer
	Custom dimensions on request

INSTALLATION PATTERNS

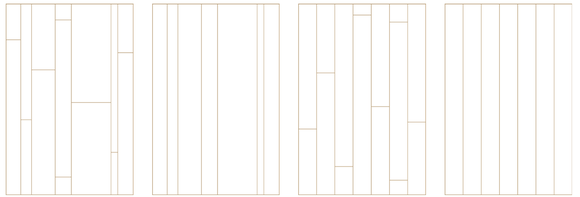

random widths,
random lengths

random widths,
fixed lengths · room lenght

fixed widths,
random lengths

fixed widths,
fixed lengths · room lenght

Custom patterns on request

GRADES



Reclaimed

Grade Image is for guidance only. Wood is a natural material, colour and grain can vary.

SURFACE SPECIFICATIONS

WOOD TYPE	Quercus robur - quercus petrea
GRADES	Reclaimed
HAPTICS	Worn Texture + Nail Holes + unfilled small Knots and Cracks + Defects
COLOURS	TDW Reclaimed Collection · Custom
PROTECTION	Natural Oil
BEVELS	1 mm Nickel Gap + Light Distressed
OPTIONS	Wood Insert Repairs on open Knots and Cracks

TECHNICAL INFORMATION

CE-CERTIFICATION	EN 13489(14342)
PEFC	PEFC/04-31-2700
FORMALDEHYDE EMISSION	E1
FIRE CLASS	Dfl - s1
UNDERFLOOR HEATING	suitable
UNDERFLOOR COOLING	suitable
INSTALLATION	full-surface glue-down
APPLICATION AREA	private · commercial
WOOD MOISTURE	7 % (+/- 2 %)
	Optional extra drying – upon prior request

SPEC SHEET

Grand Oak Plank Herringbone 15 Reclaimed

PRODUCT

Oak flooring planks laid in a 45° interlocked Herringbone pattern. Widths and lengths are fixed, set by the pattern itself.

COLLECTION

The Reclaimed Collection brings the character of genuinely old, reclaimed timber, worn surfaces, visible defects and aged patina into new wood. This removes the size and quantity limits that real salvaged material imposes. It is one fixed combination of colour, grade and surface haptic.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Spruce · Spruce



DIMENSIONS

LENGTHS	min. 450 mm - max. 1500 mm
WIDTHS	min. 40 mm - max. 200 mm
THICKNESS	15 mm · 4 mm top layer + 9 mm core + 2 mm back layer
	Custom dimensions on request

SPEC SHEET

Grand Oak Plank Herringbone 19 Reclaimed

PRODUCT

Oak flooring planks laid in a 45° interlocked Herringbone pattern. Widths and lengths are fixed, set by the pattern itself.

COLLECTION

The Reclaimed Collection brings the character of genuinely old, reclaimed timber, worn surfaces, visible defects and aged patina into new wood. This removes the size and quantity limits that real salvaged material imposes. It is one fixed combination of colour, grade and surface haptic.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Pine · Oak



DIMENSIONS

LENGTHS	min. 450 mm - max. 1500 mm
WIDTHS	min. 40 mm - max. 200 mm
THICKNESS	19 mm · 5 mm top layer + 9,5 mm core + 4,5 mm back layer
	Custom dimensions on request

INSTALLATION PATTERNS



Herringbone

GRADES



Reclaimed

Grade Image is for guidance only. Wood is a natural material, colour and grain can vary.

SURFACE SPECIFICATIONS

WOOD TYPE	Quercus robur - quercus petrea
GRADES	Reclaimed
HAPTICS	Worn Texture + Nail Holes + unfilled small Knots and Cracks + Defects
COLOURS	TDW Reclaimed Collection · Custom
PROTECTION	Natural Oil
BEVELS	1 mm Nickel Gap + Light Distressed
OPTIONS	Wood Insert Repairs on open Knots and Cracks

TECHNICAL INFORMATION

CE-CERTIFICATION	EN 13489(14342)
PEFC	PEFC/04-31-2700
FORMALDEHYDE EMISSION	E1
FIRE CLASS	Dfl - s1
UNDERFLOOR HEATING	suitable
UNDERFLOOR COOLING	suitable
INSTALLATION	full-surface glue-down
APPLICATION AREA	private · commercial
WOOD MOISTURE	7 % (+/- 2 %)
	Optional extra drying - upon prior request

SPEC SHEET

Grand Oak Plank Chevron 15 Reclaimed

PRODUCT

Oak flooring planks laid in a 45° interlocked Herringbone pattern. Widths and lengths are fixed, set by the pattern itself.

COLLECTION

The Reclaimed Collection brings the character of genuinely old, reclaimed timber, worn surfaces, visible defects and aged patina into new wood. This removes the size and quantity limits that real salvaged material imposes. It is one fixed combination of colour, grade and surface haptic.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Spruce · Spruce



DIMENSIONS

LENGTHS	min. 450 mm - max. 1500 mm
WIDTHS	min. 40 mm - max. 200 mm
THICKNESS	15 mm · 4 mm top layer + 9 mm core + 2 mm back layer
	Custom dimensions on request

SPEC SHEET

Grand Oak Plank Chevron 19 Reclaimed

PRODUCT

Oak flooring planks laid in a 45° interlocked Herringbone pattern. Widths and lengths are fixed, set by the pattern itself.

COLLECTION

The Reclaimed Collection brings the character of genuinely old, reclaimed timber, worn surfaces, visible defects and aged patina into new wood. This removes the size and quantity limits that real salvaged material imposes. It is one fixed combination of colour, grade and surface haptic.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Pine · Oak



DIMENSIONS

LENGTHS	min. 450 mm - max. 1500 mm
WIDTHS	min. 40 mm - max. 200 mm
THICKNESS	19 mm · 5 mm top layer + 9,5 mm core + 4,5 mm back layer
	Custom dimensions on request

INSTALLATION PATTERNS



Chevron 45°

Chevron 60°

GRADES



Reclaimed

Grade Image is for guidance only. Wood is a natural material, colour and grain can vary.

SURFACE SPECIFICATIONS

WOOD TYPE	Quercus robur - quercus petrea
GRADES	Reclaimed
HAPTICS	Worn Texture + Nail Holes + unfilled small Knots and Cracks + Defects
COLOURS	TDW Reclaimed Collection · Custom
PROTECTION	Natural Oil
BEVELS	1 mm Nickel Gap + Light Distressed
OPTIONS	Wood Insert Repairs on open Knots and Cracks

TECHNICAL INFORMATION

CE-CERTIFICATION	EN 13489(14342)
PEFC	PEFC/04-31-2700
FORMALDEHYDE EMISSION	E1
FIRE CLASS	Dfl - s1
UNDERFLOOR HEATING	suitable
UNDERFLOOR COOLING	suitable
INSTALLATION	full-surface glue-down
APPLICATION AREA	private · commercial
WOOD MOISTURE	7 % (+/- 2 %)
	Optional extra drying - upon prior request

SPEC SHEET

Rift and Quarter Plank Reclaimed

PRODUCT

A quarter and rift-sawn cut brings out the most expressive wood from the heart of the log, showcasing a striking grain with prominent medullary rays. An old patina and a worn texture meet nail holes and natural defects.

COLLECTION

The Reclaimed Collection brings the character of genuinely old, reclaimed timber, worn surfaces, visible defects and aged patina into new wood. This removes the size and quantity limits that real salvaged material imposes. It is one fixed combination of colour, grade and surface haptic.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Pine · Oak



DIMENSIONS

LENGTHS	min. 450 mm - max. 5000 mm
WIDTHS	min. 40 mm - max. 150 mm
THICKNESS	19 mm · 5 mm top layer + 9,5 mm core + 4,5 mm back layer
	Custom dimensions on request

INSTALLATION PATTERNS



random widths,
random lengths



random widths,
fixed lengths · room lenght



fixed widths,
random lengths



fixed widths,
fixed lengths · room lenght



Herringbone



Chevron

Custom patterns on request

GRADES



Reclaimed

Grade Image is for guidance only. Wood is a natural material, colour and grain can vary.

SURFACE SPECIFICATIONS

WOOD TYPE	Quercus robur - quercus petrea
GRADES	Reclaimed
HAPTICS	Worn Texture + Nail Holes + unfilled small Knots and Cracks + Defects
COLOURS	TDW Reclaimed Collection · Custom
PROTECTION	Natural Oil
BEVELS	1 mm Nickel Gap + Light Distressed
OPTIONS	Wood Insert Repairs on open Knots and Cracks

TECHNICAL INFORMATION

CE-CERTIFICATION	EN 13489(14342)
PEFC	PEFC/04-31-2700
FORMALDEHYDE EMISSION	E1
FIRE CLASS	Dfl - s1
UNDERFLOOR HEATING	suitable
UNDERFLOOR COOLING	suitable
INSTALLATION	full-surface glue-down
APPLICATION AREA	private · commercial
WOOD MOISTURE	7 % (+/- 2 %)
	Optional extra drying – upon prior request

SPEC SHEET

Wall & Ceiling Oak Architectural Reclaimed

PRODUCT

Wide-format oak paneling for walls, sized to the design intent, not a catalog standard. Lighter and more stable than solid plank, which makes installation easier and lowers cost. The finished wall matches the exact oak used on the floor beneath it.

COLLECTION

The Reclaimed Collection brings the character of genuinely old, reclaimed timber, worn surfaces, visible defects and aged patina into new wood. This removes the size and quantity limits that real salvaged material imposes. It is one fixed combination of colour, grade and surface haptic.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Pine · Oak

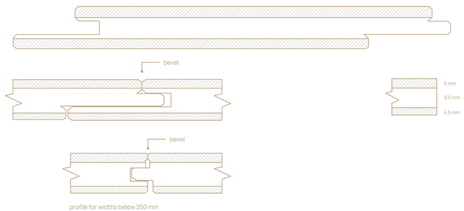

DIMENSIONS

LENGTHS	min. 450 mm - max. 8000 mm
WIDTHS	min. 40 mm - max. 400 mm · shiplap min. 250 mm
THICKNESS	19 mm · 5 mm top layer + 9,5 mm core + 4,5 mm back layer

Custom dimensions on request

INSTALLATION PATTERNS

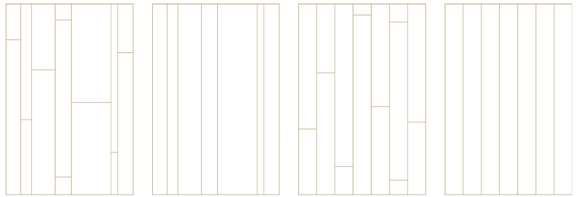

random widths,
random lengths

random widths,
fixed lengths · room lenght

fixed widths,
random lengths

fixed widths,
fixed lengths · room lenght

GRADES



Reclaimed

Grade Image is for guidance only. Wood is a natural material, colour and grain can vary.

SURFACE SPECIFICATIONS

WOOD TYPE	Quercus robur - quercus petrea
GRADES	Reclaimed
HAPTICS	Worn Texture + Nail Holes + unfilled small Knots and Cracks + Defects
COLOURS	TDW Reclaimed Collection · Custom
PROTECTION	Natural Oil
BEVELS	1 mm Nickel Gap + Light Distressed
OPTIONS	Wood Insert Repairs on open Knots and Cracks

TECHNICAL INFORMATION

CE-CERTIFICATION	EN 13489(14342)
PEFC	PEFC/04-31-2700
FORMALDEHYDE EMISSION	E1
FIRE CLASS	Dfl - s1
UNDERFLOOR HEATING	not applicable
UNDERFLOOR COOLING	not applicable
APPLICATION AREA	private · commercial
WOOD MOISTURE	7 % (+/- 2 %)

Optional extra drying – upon prior request

SPEC SHEET

Interior Door Oak 45 Reclaimed

PRODUCT

Custom doors, manufactured to measure for each project. Built on a frame system designed for a refined appearance and a straightforward installation.

COLLECTION

The Reclaimed Collection brings the character of genuinely old, reclaimed timber, worn surfaces, visible defects and aged patina into new wood. This removes the size and quantity limits that real salvaged material imposes. It is one fixed combination of colour, grade and surface haptic.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Pine · Oak



DIMENSIONS

HEIGHTS	min. 2000 mm - max. 4000 mm
WIDTHS	min. 600 mm - max. 1200 mm
THICKNESS	45 mm · 19 mm + 7 mm + 19 mm

Custom dimensions on request

VENEER LAYOUT



Single Leaf



Two-Leaf



Multi-Leaf

Custom layouts on request

GRADES



Reclaimed

Grade Image is for guidance only. Wood is a natural material, colour and grain can vary.

SURFACE SPECIFICATIONS

WOOD TYPE	Quercus robur - quercus petrea
GRADES	Reclaimed
HAPTICS	Worn Texture + Nail Holes + unfilled small Knots and Cracks + Defects
COLOURS	TDW Reclaimed Collection · Custom
PROTECTION	Natural Oil
BEVELS	1 mm Nickel Gap + Light Distressed
OPTIONS	Wood Insert Repairs on open Knots and Cracks

TECHNICAL INFORMATION

CE-CERTIFICATION	EN 13489(14342)
PEFC	PEFC/04-31-2700
FORMALDEHYDE EMISSION	E1
FIRE CLASS	Dfl - s1
UNDERFLOOR HEATING	not applicable
UNDERFLOOR COOLING	not applicable
APPLICATION AREA	private · commercial
WOOD MOISTURE	7 % (+/- 2 %)

Optional extra drying – upon prior request

SPEC SHEET

Tread Set Oak 40 Reclaimed Tread and Riser

PRODUCT

A matched tread and riser, supplied as a set. Standard thickness is 40 mm; custom dimensions are built directly from shop drawings when the project calls for it.

COLLECTION

The Reclaimed Collection brings the character of genuinely old, reclaimed timber, worn surfaces, visible defects and aged patina into new wood. This removes the size and quantity limits that real salvaged material imposes. It is one fixed combination of colour, grade and surface haptic.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Pine · Oak

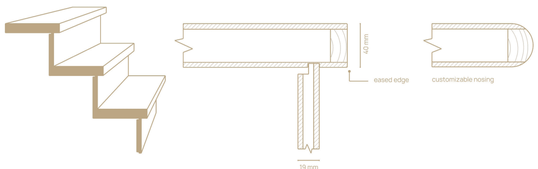

DIMENSIONS

LENGHTS	min. 900 mm - max. 7000 mm
WIDTHS	min. 180 mm - max. 500 mm
THICKNESS	40 mm standard · 15 mm - 50 mm customized
	Custom dimensions on request

SPEC SHEET

Tread Set Oak Reclaimed Mitered

PRODUCT

A matched tread and riser, supplied as a set. Standard thickness is 40 mm; custom dimensions are built directly from shop drawings when the project calls for it.

COLLECTION

The Reclaimed Collection brings the character of genuinely old, reclaimed timber, worn surfaces, visible defects and aged patina into new wood. This removes the size and quantity limits that real salvaged material imposes. It is one fixed combination of colour, grade and surface haptic.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Pine · Oak

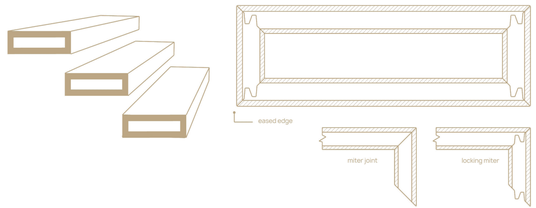

DIMENSIONS

LENGHTS	min. 900 mm - max. 7000 mm
WIDTHS	min. 180 mm - max. 500 mm
THICKNESS	19 mm · 5 mm oak top layer + 9,5 mm plywood + 4,5 mm back layer
	Custom dimensions on request

GRADES



Reclaimed

Grade Image is for guidance only. Wood is a natural material, colour and grain can vary.

SURFACE SPECIFICATIONS

WOOD TYPE	Quercus robur - quercus petrea
GRADES	Reclaimed
HAPTICS	Worn Texture + Nail Holes + unfilled small Knots and Cracks + Defects
COLOURS	TDW Reclaimed Collection · Custom
PROTECTION	Natural Oil
BEVELS	1 mm Nickel Gap + Light Distressed
OPTIONS	Wood Insert Repairs on open Knots and Cracks

TECHNICAL INFORMATION

CE-CERTIFICATION	EN 13489(14342)
PEFC	PEFC/04-31-2700
FORMALDEHYDE EMISSION	E1
FIRE CLASS	Dfl - s1
UNDERFLOOR HEATING	not applicable
UNDERFLOOR COOLING	not applicable
APPLICATION AREA	private · commercial
WOOD MOISTURE	7 % (+/- 2 %)
	Optional extra drying – upon prior request

SPEC SHEET

Box Beam Oak Reclaimed

PRODUCT

Pre-mitered, custom-sized blanks for wrapping existing beams or building the beam look from scratch. Every dimension is made to size and mitered ready for use. Choose flat-packed for on-site assembly, or pre-assembled and delivered complete.

COLLECTION

The Reclaimed Collection brings the character of genuinely old, reclaimed timber, worn surfaces, visible defects and aged patina into new wood. This removes the size and quantity limits that real salvaged material imposes. It is one fixed combination of colour, grade and surface haptic.

SECTIONAL VIEW

Construction: Engineered balanced 3-layer, Oak · Plywood · Oak

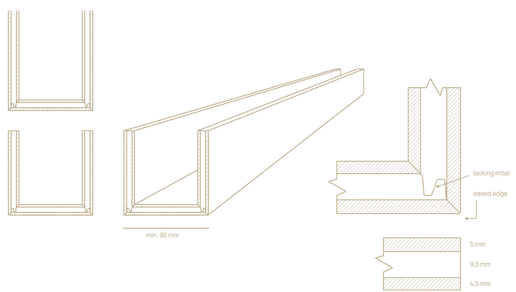

DIMENSIONS

LENGTHS	min. 450 mm - max. 12000 mm
WIDTHS · HEIGHTS	min. 95 mm - max. 500 mm
THICKNESS	19 mm · 5 mm top layer + 9,5 mm plywood core + 4,5 mm back layer
	Custom dimensions on request

GRADES



Reclaimed

Grade Image is for guidance only. Wood is a natural material, colour and grain can vary.

SURFACE SPECIFICATIONS

WOOD TYPE	Quercus robur - quercus petrea
GRADES	Reclaimed
HAPTICS	Worn Texture + Nail Holes + unfilled small Knots and Cracks + Defects
COLOURS	TDW Reclaimed Collection · Custom
PROTECTION	Natural Oil
BEVELS	1 mm Nickel Gap + Light Distressed
OPTIONS	Wood Insert Repairs on open Knots and Cracks

TECHNICAL INFORMATION

CE-CERTIFICATION	EN 13489(14342)
PEFC	PEFC/04-31-2700
FORMALDEHYDE EMISSION	E1
FIRE CLASS	Dfl - s1
UNDERFLOOR HEATING	not applicable
UNDERFLOOR COOLING	not applicable
APPLICATION AREA	private · commercial
WOOD MOISTURE	7 % (+/- 2 %)
	Optional extra drying – upon prior request